

PAWSD Permit # _____ Acct # _____ Location # _____

Water WO#: _____

W/W WO#: _____

Copy to Scott: _____

2022

PAGOSA AREA WATER & SANITATION DISTRICT
WATER/WASTEWATER CONNECTION REQUEST PERMIT

Multi-Dwelling – Commercial – Mixed Use

100 Lyn Avenue; Pagosa Springs CO 81147

www.pawsd.org

(970) 731-7621

Date: _____ connections@pawsd.org

Backfill WO #: _____ Inspection Date: _____ Approved: Yes No Added to Statement: _____

Fixture Count: _____ Meter Size: _____ Billing EU: _____ (1) Water: _____ (9): Drought: _____ (3) W/W: _____

Modeling Required: Yes No / Modeling Form Completed: Yes No / Modeling Fee Paid: Yes No

Below Portion to be completed by Owner or Agent

Water Meter Sizing Worksheet Maybe Required

Name of property owner: _____

Mailing Address: _____

Mailing Address

City / State / Zip Code

Phone # (Home): _____ (Work): _____ (Cell): _____

E-mail Address: _____

Location of property

Street address: _____

Subdivision: _____ block, if applicable: _____ lot: _____

General contractor: _____ Phone number: _____

Excavator: _____ Phone number: _____

_____***Commercial / Industrial** ____***Mixed-Use** ____***Frost Free Hydrant &/or Lawn Sprinkler System**

*** Multi-Dwelling Types (Definitions on Page 2):**

1). _____ **Townhome/Duplex, Triplex, etc:** **Total # of Living Units:** _____ **# of Phases:** _____

2). _____ **Apartments/Condos:** **Total # of Living Units:** _____ **# of Phases:** _____

Metering Options:

1 Meter for entire complex: _____ **1 Meter/Bldg:** _____ **1 Meter to Each Living Unit:** _____ **Unit #:** _____

***Connections required to have a Reduced Pressure Zone Backflow Prevention Device. See Pg 5.**

Meters are padlocked until Device is inspected & approved.

If issued, Building Permit #: _____ Building Permit Attached: _____

Backfill Inspection Fee: After initial inspection, a **\$50 fee will be assessed to the account**, for each additional backfill inspection. Requirements: **1).** Same day as meter pit is installed; **2).** 2" from top of cast iron lid, **3).** 4 ft. perimeter around **ENTIRE** meter pit. See Pg. 2 for illustration.

Wastewater Backflow Prevention Device: The property owner is encouraged to install a **Wastewater (sewer) Backflow Prevention Device** on their service line. See the District's office for details.

I/we agree to comply with the terms of the Pagosa Area Water & Sanitation District Water / Wastewater Connection Permit Request form, and acknowledge any change in fixture count or change-in-use may require an increase or decrease in meter size and corresponding fee(s) assessment. Connections and accounts are subject to the PAWSD Rules & Regulations.

I acknowledge that PAWSD does NOT guarantee location of main(s) and/or service lines(s).

Property Owner or Agent Signature: _____ **Date:** _____

Connection: _____ / _____ / _____
Time Day Date

2022
Connection Fee Information
 Revised 01/13/2022

The Multi-Dwelling & Commercial Water Meter Sizing Worksheet is used to calculate the Water Meter Size, Connection Fee assessments, potential water &/or sewer modeling, and service monthly billing calculations.

Connection Fees:

3/4" Standard Water Meter: \$1,800

1" Water Meter: \$2,125

1.5" Water Meter: \$7,050

2" Water Meter: \$7,735

*Sewer - Gravity: \$ 400

Capital Investment Fee per EU:

Water: \$2,991

*Sewer: \$1,145

Raw Water Acquisition Fee per EU: \$2,205

NOTE: If a change in fixture count or a change-in-use is anticipated, a "beginning" and a "full build-out" fixture count are required. The owner is responsible to provide any changes to the District and for any/all additional costs/fees

* PAWSD sewer service is not available in all areas.

Multi Dwelling Definitions

Townhome/Duplex, Triplex, etc: Group of residences within a single building joined by common walls.

Apartments/Condos: Group of residences within a single building with *shared heating & plumbing, internal access shared hallways, with single land ownership on a master water meter.*


Mixed Use: Each residence is 1 Equivalent Unit. Commercial Meter Sizing Worksheet determines the Commercial EU portion. The total EU determine the assessments.

TERMS

THE FOLLOWING IS THE RESPONSIBILITY OF THE PROPERTY OWNER AND MUST BE MET BY THE CONNECTION TIME AT THE PROPERTY SITE OR CANCELLATION MAY OCCUR RESULTING IN A \$100.00 CANCELLATION-NO SHOW FEE

Illustration of Meter Pit Backfill

- METER PIT BACKFILL REQUIREMENTS:** 1). Same day as meter pit is installed; 2). 2" from top of cast iron lid, 3). 4 ft. perimeter around **ENTIRE** meter pit.

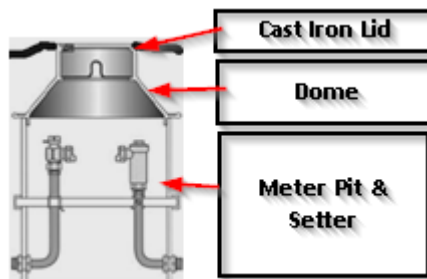

BACKFILL 2 INCHES FROM TOP OF THE CAST IRON LID, LOCATED ON TOP OF THE DOME
Same Day that Meter Pit is Installed

- **SHORING:** The Property Owner is responsible to shore all trenches deeper than 4 ft.
- **PERMITS & REGULATORY REQUIREMENTS:** All Permits or regulatory requirements necessary for the installation, repair, and/or maintenance of a service line, is the sole responsibility of the property owner.
- **EXCAVATOR & OPERATOR:** Minimum size of backhoe/excavator, equivalent to 580 with rubber tire & 24" bucket. District recommends that the operator have a "spotter" on site during excavation. PAWSD staff will *NOT* act a spotter, for any other utilities, during excavation.
- **PROPERTY PINS:** Located to determine utility easement.
- **UTILITIES:** All other utilities must be marked. District staff will do their best to locate the District's main lines on the day of connection.
- **BEDDING MATERIAL:** District requires minimum bedding of 4" below and 12" above pipe with debris free fill. See City/County Specs for their individual requirements.
- **BARRICADWS & SIGNS:** See City/County Specs for their requirements.
- **CANCELATION POLICY:** District contacted minimum of 30 minutes prior to connection time.
- **TRACER WIRE:** The Property owner is responsible to install tracer wire from the Meter Pit to the structure. Both ends of tracer wire must be accessible.
- **PRIVATE UTILITY EASEMENTS:** Property Owners or Agents are responsible for acquiring the proper easements for the water and/or sewer connections.

ADDITIONAL TERMS

1. **SUMP PUMP:** It is illegal to discharge sump pump(s) into the District's sewer system.
2. **WATER FITTINGS:** Property owner is responsible to provide fitting between meter pit and their pipe (male iron pipe thread coming out of pit, property owner needs female iron pipe thread).
3. **SEWER INSTALLATION:** District completes tap at main line. Property owner is responsible for all excavation, materials (typically, pipe is 4" PVC Schedule 35), & installation of service line beyond the main line tapping saddle. Suggested minimum fall for 4" pipe is 6" per 100 ft.
4. **SEWER MAINTENANCE:** Maintenance of any sewer service line, whether commercial or residential, is the sole responsibility of the property owner of the property serviced by the sewer service line. On properties where more than one property shares a sewer service, the affected property owners share the responsibility to maintain and repair the sewer service line, in its entirety.
5. **HIGH PRESSURE WASTEWATER LINE:** Properties provided with this service may require an Environmental One lift station (or equivalent), lateral kit and valve box. Property Owner is responsible for all excavation, materials, installation, and maintenance of service line beyond the main line tapping saddle
6. **CONNECTION REFUND:** Any portion of the physical connection NOT completed by the conclusion (typically Oct 31st) of this year's District Connection Season shall be refunded. When service is requested ins subsequent years, a current Connection Request Permit must be completed and all applicable fees paid.
7. **EXCAVATION: Trench safety is at District discretion.** Under District's supervision, property owner is responsible for all excavation (blasting, trenching, backfill, compaction, & ground water pumping) beginning at & including exposing main line. District can NOT guarantee location of main or service line(s).
8. **PRE-EXCAVATION:** District is not responsible for misalignment, should excavation occur prior to connection.
9. **TRENCH SHARING:** Permitted 5 ft. beyond property line, with a suggested 2 ft. horizontal separation. Colorado Law requires a minimum 10 ft. horizontal separation between water & wastewater lines.
10. **FROST LINE:** To prevent freezing of water and/or hi-pressure wastewater lines, lines should be located minimum depth of 4 ft.
11. **UTILITY EASEMENT:** When landscaping in & around utility easements, use common sense. In event of leak or other repair, area is at mercy of repair equipment.
12. **WATER PRESSURE:** Is property owner's responsibility and expense to reduce / increase water pressure past water meter pit.

- 13. UNAUTHORIZED CONNECTION:** No excavation of or connection to District water and/or wastewater line(s) shall be made without permission and supervision by District personnel. To do otherwise, could constitute property owner liability for all repairs and applicable fines.
- 14. CAPITAL INVESTMENT FEE/RAW WATER ACQUISITION FEE:** Property owner's responsibility to notify the District of change in water fixture count or change-in-use.
- 15. BILLING:** After connection is completed, availability fee ceases and monthly service assessment begins.

Cross-Connection Control Program

In order to ensure safe drinking water, Federal and State legislation have sanctioned water authorities, such as PAWSD, with the responsibility & authority to implement & maintain a Cross-Connection Control Program. Additionally, water authorities will specify, inspect, & receive documentation on all backflow prevention devices. PAWSD has determined a **REDUCED PRESSURE ZONE Backflow Prevention Device (BPD)** will be required for non-residential service connections, existing and future.

General Information:

- All costs for design, installation, maintenance, repair, & testing of the BPD are to be borne by the property owner.
- In NO case will it be permissible to have connections between the meter & the BPD, without District pre-notification, approval, and inspection.
- Testing will be done to insure proper operation of the BPD.
 - It will be the responsibility of the property owner to have certified tests made.
 - Each test will be performed by a Certified Technician approved by the Colorado Department of Public Health & Environment & PAWSD.
 - It will be tested at the time of installation & on an annual basis thereafter.
 - Each test will be conducted in accordance with ASSE and/or USC-CCC & HR Performance Standards & Field Test Procedures, as directed by the Colorado Department of Public Health & Environment.
- Records of all tests, repairs or replacement shall be kept by both property owner & PAWSD.
- As necessary, whenever the BPD is found to be defective, it will be the property owner's responsibility to repair or replace the device.
- Discontinuance of water service may occur when:
 - Property owner fails to cooperate in the installation, maintenance, testing or inspection of the BPD.
 - An unprotected Cross-Connection exists.
 - Any BPD is found to be defective, removed or bypassed.

Installation Information:

- Before installing the BPD, pipelines should be thoroughly flushed to remove foreign material, as this may cause the BPD to malfunction.
- The BPD will be installed:
 - By a Colorado Licensed Plumber.
 - Immediately upon service line entry to the building, upstream of any other connection to the service line.
 - In an accessible location to facilitate maintenance, testing and repair. Where building security is required, it should be located in an area not subject to security.
 - Shall be inspected in accordance with the State and current local Plumbing Codes
 - At least twelve (12) inches above the finish grade to allow clearance for the repair work.
 - A concrete slab at finish grade is recommended.
 - Proper drainage should be provided for the relief valve. Drainage may be piped away from the location if drainpipe is readily visible from above grade & the relief valve is separated from the drain line by a minimum of double the diameter of the supply line.
 - Be installed in the horizontal position. Vertical installation shall only be acceptable when a Watts 909 RPZ BPD is installed.
- The BPD valves are not to be used as the inlet or outlet valve of the water meter. Test cocks shall not be used as supply connections.
- The single check valve is NOT considered a BPD.
- The District will require inspection of all containment BPD installations.
- The District retains the right to test or otherwise check the installation and operation of any containment assembly at any time to assure proper operation.

Other Information:

- Representatives of the District will carry proper credentials as means of identification.
- By pre-arranged appointment, District personnel can inspect the building & premises for cross-connections relative to possible hazards.